



## SD4820P USB-C 10Gbps Dual Video Driverless Docking Station

Part Number: K38042US | UPC Code: 8589638042

The ultimate  
driverless  
USB-C  
docking  
station.

Increase your productivity and experience the ultimate plug and play docking experience with the SD4820P USB-C 10Gbps Dual Video Driverless Docking Station. Use the single USB-C cable connection to power your PC device, transfer video, audio, and data at up to 10Gbps, and connect up to two external displays –all with no driver installation required.

- **Driverless USB-C Connectivity** – Transfer data (up to 10Gbps), video, and audio, and provide up to 60W of power delivery (PD 3.0)\* via a single cable for a simple plug and play experience with no software installation required. \*Host device must support Power Delivery and DisplayPort Alt mode over USB-C
- **Dual Video Output** – Provides two DisplayPort++ ports and one HDMI port to allow users to select the right connections and resolutions for their environment –while also eliminating the need for expensive adapters. Supports up to Dual 4K @ 30Hz or Single 4K @ 60Hz in 4 Lane mode.
- **11-in-1 Dock with 6 USB Ports** – Extend productivity capabilities via DP++ and HDMI video ports, six USB ports –(Front: one USB-C 3.1 Gen2 port up to 5V/3A/10Gbps and one USB-A 3.1 Gen2 port up to 5V/2.4A/10Gbps // Rear: four USB-A 3.1 Gen1 ports up to 5V/0.9A/5Gbps), Gigabit Ethernet and a combo audio port.
- **Universal Windows Compatibility** – Seamlessly connects to any Windows 7 or above laptop equipped with USB-C. An ideal dock for HP, Lenovo and Dell devices.
- **1M USB-C Cable** – Provides extra cable length to easily accommodate different desktop configurations.



All specifications are subject to change without notice. Products may not be available in all markets. Kensington and the ACCO name and design are registered trademarks of ACCO Brands. Kensington The Professionals' Choice is a trademark of ACCO Brands. All other registered and unregistered trademarks are the property of their respective owners. Thunderbolt and the Thunderbolt logo are trademarks of Intel Corporation in the U.S. and/or other countries. © 2019 Kensington Computer Products Group, a division of ACCO Brands. All rights reserved. K19\_3583

**FOR MORE INFORMATION CONTACT:** 1-855-692-0054 | [sales@kensington.com](mailto:sales@kensington.com)

**Kensington**  
The Professionals' Choice™


## SD4820P USB-C 10Gbps Dual Video Driverless Docking Station

Part Number: K38042US | UPC Code: 8589638042

Front



Back

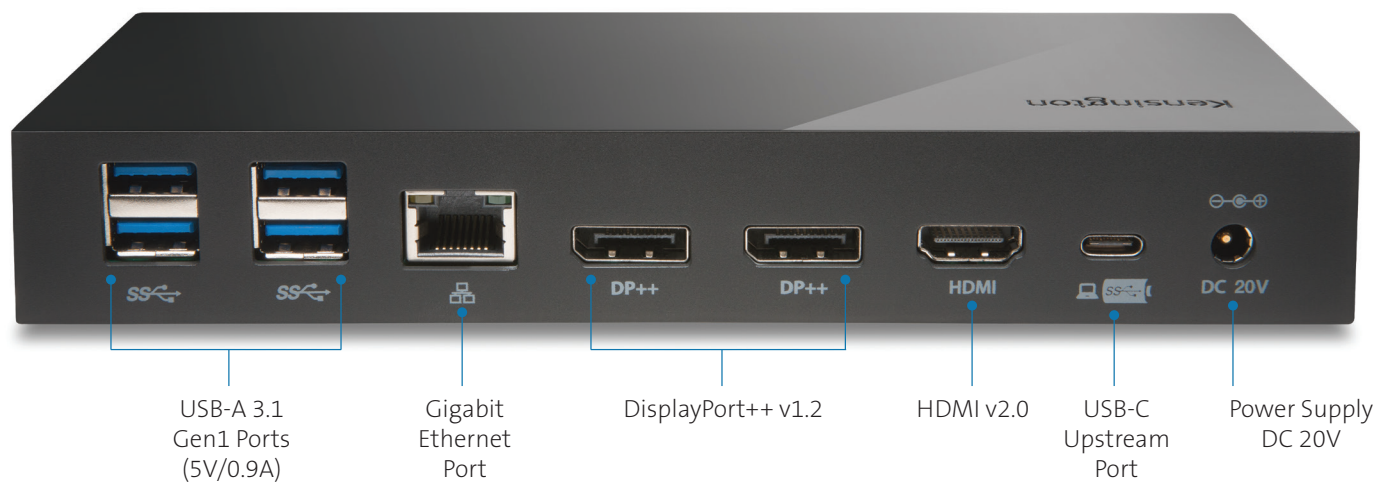

## SD4820P USB-C 10Gbps Dual Video Driverless Docking Station

Part Number: K38042US | UPC Code: 8589638042

### System Requirements

Operating Systems Supported	Windows 7 or above
System Resource Requirement	Host device must support Power Delivery and DisplayPort Alt mode over USB-C
USB-C Power Delivery	Supports USB-C PD 3.0 5V/9V/12V/15V/20V up to 3A 60W Maximum

### Host Connectivity

Host Docking Connector	USB-C
------------------------	-------

### Video Connections

		Single Video Output		Dual Video Output		USB A / USB C Ports (front)	USB A Ports (back)	Ethernet Port
		DP or HDMI	DP/DP	DP/HDMI	DP/HDMI			
<b>2 Lane Default Mode™</b>	HBR2 (DP1.2)	2560*1440 @60HZ 3840*2160 @30HZ	1920*1080 @60HZ --	1920*1080 @60HZ --	USB 3.1 Gen2 (10Gbps)	USB 3.1 Gen 1 (5Gbps)	1000Mbps	
	HBR3 (DP1.3)	3840*2160 @60HZ 3840*2160 @30HZ	2560*1440 @60HZ --	2560*1440 @60HZ --				
<b>4 Lane Video Boost Mode</b>	HBR2 (DP1.2)	2560*1440 @60HZ 3840*2160 @30HZ	2560*1440 @60HZ 3840*2160 @30HZ	2560*1440 @60HZ 3840*2160 @30HZ	USB 2.0 (480Mbps)	USB 2.0 (480Mbps)	100Mbps	
	HBR3 (DP1.3)	3840*2160 @60HZ 3840*2160 @30HZ	3840*2160 @60HZ 3840*2160 @30HZ	3840*2160 @60HZ 3840*2160 @30HZ				

### USB Connections

Front	USB-C Gen 2, charging up to 5V/3A: One USB-A 3.1 Gen 2, charging up to 5V/2.4A: One
Back	USB-A 3.1 Gen1, charging up to 5V/0.9A: Four USB-C Upstream Port: One

### Network Connections

Ethernet Port	RJ45
Compatible Ethernet Speed	10/100/1000 Mbps

### Audio Connections

Audio Connectors	3.5mm combo audio port
Audio Channels Supported	Stereo LR

## Power and Environmental

Power Adapter Rating	Input: 100-240V; 2.5A Max Output: 20V DC; 6.75A AC: 50/60Hz; 1.8A
Operating Temperature	10 to 40° C (50 to 104° F)
Storage Temperature	-10 to 60° C (-14 to 140° F)
Relative Humidity	5% to 95% non-condensing

## Product Dimensions

Unit Dimensions	Width: 77.52mm (3.05in) Depth: 135.52mm (5.33in) Height: 16mm (0.63in)
Unit Weight	110g (3.88oz)
Cable Length	Tethered cable and up to 1M (3ft)
Enclosure Color and Material	Black PC + ABS

## Packaging Dimensions

Packaging Style	Retail Box, Brown Box
Packaging Specifications	Width: 135mm (5.31in) Depth: 200mm (7.87in) Height: 55mm (2.17in) 190g (6.7lbs)
Master Carton	5 pcs
Package Contents	One SD4820P Dock One USB-C to USB-C Cable, 1M (3ft) One AC Power Adapter with US power cable included One Quick Start Instruction Guide Warranty Information

## Country of Origin, Regulatory and Warranty

Country of Origin	China
Certifications and Compliance	CE, FCC, RCM, REACH, RoHS, WEEE, HDMI 2.0 Certified
Warranty	3-Years limited worldwide

## Other Features

Security	Kensington Security Slot
VESA Mount Compatible	Mounting plate sold separately (K33959WW)



All specifications are subject to change without notice. Products may not be available in all markets. Kensington and the ACCO name and design are registered trademarks of ACCO Brands. Kensington The Professionals' Choice is a trademark of ACCO Brands. All other registered and unregistered trademarks are the property of their respective owners. Thunderbolt and the Thunderbolt logo are trademarks of Intel Corporation in the U.S. and/or other countries. © 2019 Kensington Computer Products Group, a division of ACCO Brands. All rights reserved. K19\_3583

FOR MORE INFORMATION CONTACT: 1-855-692-0054 | sales@kensington.com

**Kensington**  
The Professionals' Choice™