

SD3220U3 EQ USB-C® 10Gbps Triple Video Driverless Dock - TAA

Part Number: K32803NA | UPC: 0 85896 00431 8

The essential and hassle-free USB-C® dock.



IT buyers often struggle with managing different docks for various laptops, missing out on the advantages of a unified solution that supports multiple external monitors.

The SD3220U3 EQ USB-C® 10Gbps Triple Video Driverless Dock addresses these issues with a hassle-free solution. Compatible with Thunderbolt™ 5, Thunderbolt™ 4, USB4®, and USB-C® Alt Mode Windows laptops.

SD3220U3 provides all the essential ports needed for professional workflows, including support for up to three external 4K monitors, convenient front and back high-speed USB-A and USB-C® ports, laptop and phone charging, audio output, and Ethernet connectivity. Features include:

- Up to three external monitors via one HDMI® and two DisplayPort™ (DP) connections
- Compatible with Thunderbolt™ 5, Thunderbolt™ 4, USB4®, and USB-C® Alt-Mode devices running Windows 10 or 11
- Up to 100W of power to host laptop and connected accessories

- 10-in-1 design
- Outer case made of plastic containing 71% post-consumer recycled (PCR) content.
- Zero-footprint mounting option
- Security cable lock slots
- · 3-year limited warranty
- TAA compliant


SD3220U3 EQ USB-C® 10Gbps Triple Video Driverless Dock

Part Number: K32803NA | UPC: 0 85896 00431 8

Front




Back

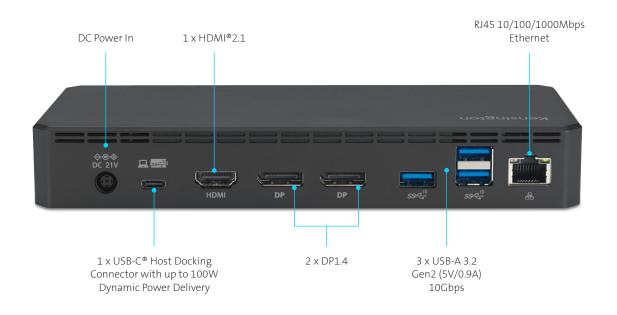

SD3220U3 EQ USB-C® 10Gbps Triple Video Driverless Dock

Part Number: K32803NA | UPC: 0 85896 00431 8



Triple Video Displays

Supports up to three external monitors via one HDMI® and two DisplayPort™ (DP) connections – delivering up to Triple 4K @ 30Hz* or up to Single 8K @ 30Hz*.



No Drivers or Downloads

Supports Thunderbolt™ 5, Thunderbolt™ 4, USB4®, and USB-C® Alt-Mode laptops running Windows 10 or Windows 11 with up to 10Gbps. A convenient plug-and-play dock that does not require drivers or downloads.




Up to 100W Dynamic Power Delivery

Delivers power whenever and wherever you need it—to host and connected accessories even when the laptop is not docked. Supports up to 100W of power delivery to USB-C® Alt Mode laptops and provides optimal performance under any usage scenario.



USB Ports with KonstantCharge™

All five high-speed USB ports feature KonstantCharge™ technology, ensuring that connected devices receive power and continue to charge even when the host laptop is undocked.



10-in-1 Design

Provides 1x HDMI®2.1 video port, 2x DP1.4 video ports, 5x USB 3.2 Gen2 10Gbps ports, 1x combo audio jack, and 1x Gigabit Ethernet port.**



Sustainability Attributes

Outer case made of plastic containing 71% post-consumer recycled (PCR) content and delivered in Forest Stewardship Council (FSC®) certified packaging.



Zero-Footprint Mounting Option and Security Cable Lock Slots

Maximize desktop space by mounting your docking station out of the way. Mounting bracket sold separately (K34050WW). Protect your investment with a Kensington cable lock (K65020WW or K60603WW), sold separately.



Free Kensington DockWorks™ Software

Free DockWorks™ software for Windows users delivers the best connection, performance, and security from your Kensington dock.

 $[\]hbox{``For maximum resolution, the laptop, docking station, and monitor must all support DSC v1.2 (Display Stream Compression)}.$

SD3220U3 EQ USB-C® 10Gbps Triple Video Driverless Dock

Part Number: K32803NA | UPC: 0 85896 00431 8

C.		D	:	
71	/stem	Rea	juireme	nts
_	yocciii	1100	ancinc	1100

System Requirements		
	Systems Supported	Laptops with USB-C [®] port (must support USB-C [®] Alt Mode)
	Operating Systems Supported	Windows 10 or 11
	Plug & Play	Yes
	System Resource Requirement	CPU: Intel® Core™ i5 10th generation or above Memory: 8Gb or above GPU: Intel® UHD Graphics 630 or above
	Additional Software Information	Compatible with DockWorks (Windows only)
	USB-C® Power Delivery	PD3.0: 5V, 9V, 12V, 15V/3A & 20V/5A (up to 100W)
USB Interface		
	Type of USB Connector	USB-C®
	Host Connector	Supports USB 3.2 Gen2 Type-C with USB-C® Alt Mode
USB, Video, and Etherne	t Connections	
	Ports	1 x USB-C [®] 3.2 Gen2 (5V/1.5A), BC 1.2 1 x USB-A 3.2 Gen2 (5V/1.5A), 3 x USB-A 3.2 Gen2(5V/0.9A) 1 x HDMI [®] 2.1 2 x DP1.4 1 x Ethernet 10/100/1000Mbps
Network Connections		
	Ethernet Port	RJ45
	Compatible Ethernet Speeds	10/100/1000Mbps
Host Connectivity		
	Host Docking Connector	USB-C® with Dynamic Power Delivery up to 100W
LED indicator		
	Location	Power indicator (White LED)
Material Specifications		
	Exterior	PC + ABS with texture
	Bottom	PC + ABS with texture
	Product Color	Black
	Enclosure Color & Material	Black PC+ABS with Texture
	Post-Consumer Recycled Content	Outer case made of plastic containing 71% post-consumer recycled (PCR) content

SD3220U3 EQ USB-C® 10Gbps Triple Video Driverless Dock

Part Number: K32803NA | UPC: 0 85896 00431 8

Video Connections

Video Connectors	1 x HDMI®2.1 2 x DP1.4
Maximum Resolution Supported	Up to 8K @ 30Hz
Resolution Table	Refer to the resolution table below for more details.
HDCP Support	Supports HDCP 1.4 & 2.3

Windows 10 Windows 11		Ţ	ĢĢ	
Maximum	^[1] USB-C [®] Alt Mode with DP1.4 HBR3 DSC enabled	Up to 8K @ 30Hz	Up to 4K @ 60Hz	Up to 4K @ 30Hz
Standard	USB-C® Alt Mode with DP1.4 HBR3 DSC disabled	Up to 4K @ 60Hz	Up to 2K @ 60Hz	1080p @ 60Hz
Minimum	USB-C® Alt Mode with DP1.2 HBR2 with DSC disabled	Up to 4K @ 30Hz	Up to 1080p @ 60Hz	Up to 900p @ 60Hz

 $^[1] This \ USB-C^{\circledcirc} \ dock \ is \ compatible \ with \ Thunderbolt ^{\rlap{1}}4, Thunderbolt ^{\rlap{3}}5, and \ USB4^{\circledcirc} \ laptops; however, it \ operates \ at \ a \ bandwidth \ of \ up \ to \ 10Gbps$

Audio Connections

	Audio Connectors	1 x 3.5mm Audio Combo Jack
	Audio Channels Supported	Stereo LR
Other Features		
	Security Slot	Kensington Security Slot Kensington Nano Security Slot
	Mounting Option	Mounting bracket (K34050WW) sold separately
Product Dimensions		
	Unit Weight	0.56lbs (0.254kg)
	Unit without Peripherals (L x W x H)	7.87 x 3.34 x 1.18in (200 x 85 x 30mm)
	Cable Length	3.3ft (1m)

SD3220U3 EQ USB-C® 10Gbps Triple Video Driverless Dock

Part Number: K32803NA | UPC: 0 85896 00431 8

$D \sim c$	12001	$n \propto 1$)ım	anci	IODC
гац	หลยเ	ו אוו		-112	ions

Packaging Weight Packaging Dimensions (L x W x H) Packaging Content Retail Box: 1 x SD3220013 EQ USB-C° Triple 4K Display Docking Station 1 x USB-C 3.2 Gen2 passive cable 1 x 135W Power Supply Unit 1 x NA Power Cord 1 x Quick Installation Guide 1 x Compliance Sheet 1 x Warranty Card 1 x Welcome Card Master Carton Power & Environmental Power Adapter Rating Input: 100-240V; 2A Output: 21V DC 6.43A (135W) Relative Humidity Operating Temperature 32 to 113°F (0 to 45°C) Storage Temperature Country of Origin, Regulatory, and Warranty Certifications & Compliance Certification & Certification Carses Certification & Certification Carses Cert		Packaging Style	Forest Stewardship Council (FSC®) Certified Brown Package
Packaging Content Retail Box: 1 x SD3220U3 EQ USB-C® Triple 4K Display Docking Station 1 x USB-C 3.2 Gen2 passive cable 1 x 135W Power Supply Unit 1 x NA Power Cord 1 x Quick Installation Guide 1 x Compliance Sheet 1 x Warranty Card 1 x Welcome Card Master Carton 6pcs Power & Environmental Power Adapter Rating Input: 100-240V; 2A Output: 21V DC 6.43A (135W) Relative Humidity Operating Temperature 32 to 113°F (0 to 45°C) Storage Temperature -0.4 to 140°F (-18 to 60°C) Country of Origin, Regulatory, and Warranty Country of Origin Taiwan Certifications & Compliance CE, FCC, ICES, RCM, UKCA, CB, ROHS, REACH, ACCO RSL		Packaging Weight	2.18lbs (0.99kg)
1 x SD3220U3 EQ USB-C® Triple 4K Display Docking Station 1 x USB-C 3.2 Gen2 passive cable 1 x 135W Power Supply Unit 1 x NA Power Cord 1 x Quick Installation Guide 1 x Compliance Sheet 1 x Warranty Card 1 x Welcome Card Master Carton Power & Environmental Power Adapter Rating Input: 100-240V; 2A Output: 21V DC 6.43A (135W) Relative Humidity Operating Temperature 32 to 113°F (0 to 45°C) Storage Temperature -0.4 to 140°F (-18 to 60°C) Country of Origin, Regulatory, and Warranty Certifications & Compliance CE, FCC, ICES, RCM, UKCA, CB, ROHS, REACH, ACCO RSL		Packaging Dimensions (L x W x H)	8.54 x 4.25 x 4.01in (217 x 108 x 102mm)
Power & Environmental Power Adapter Rating Input: 100-240V; 2A Output: 21V DC 6.43A (135W) Relative Humidity Operating Temperature 32 to 113°F (0 to 45°C) Storage Temperature -0.4 to 140°F (-18 to 60°C) Country of Origin, Regulatory, and Warranty Country of Origin Taiwan Certifications & Compliance CE, FCC, ICES, RCM, UKCA, CB, ROHS, REACH, ACCO RSL		Packaging Content	1 x SD3220U3 EQ USB-C® Triple 4K Display Docking Station 1 x USB-C 3.2 Gen2 passive cable 1 x 135W Power Supply Unit 1 x NA Power Cord 1 x Quick Installation Guide 1 x Compliance Sheet 1 x Warranty Card
Power Adapter Rating Input: 100-240V; 2A Output: 21V DC 6.43A (135W) Relative Humidity 0% to 85% operating temperature @ 77°F (25°C) Operating Temperature 32 to 113°F (0 to 45°C) Storage Temperature -0.4 to 140°F (-18 to 60°C) Country of Origin, Regulatory, and Warranty Country of Origin Taiwan Certifications & Compliance CE, FCC, ICES, RCM, UKCA, CB, RoHS, REACH, ACCO RSL		Master Carton	6pcs
Output: 21V DC 6.43A (135W) Relative Humidity	Power & Environmenta	al	
Operating Temperature Storage Temperature -0.4 to 140°F (-18 to 60°C) Country of Origin, Regulatory, and Warranty Country of Origin Taiwan Certifications & Compliance CB, RCC, ICES, RCM, UKCA, CB, RoHS, REACH, ACCO RSL		Power Adapter Rating	•
Storage Temperature -0.4 to 140°F (-18 to 60°C) Country of Origin, Regulatory, and Warranty Country of Origin Taiwan Certifications & Compliance CE, FCC, ICES, RCM, UKCA, CB, RoHS, REACH, ACCO RSL		Relative Humidity	0% to 85% operating temperature @ 77°F (25°C)
Country of Origin, Regulatory, and Warranty Country of Origin Certifications & Compliance		Operating Temperature	32 to 113°F (0 to 45°C)
Country of Origin Certifications & Compliance CE, FCC, ICES, RCM, UKCA, CB, RoHS, REACH, ACCO RSL		Storage Temperature	-0.4 to 140°F (-18 to 60°C)
Certifications & Compliance CE, FCC, ICES, RCM, UKCA, CB, RoHS, REACH, ACCO RSL	Country of Origin, Regu	ulatory, and Warranty	
CB, RoHS, REACH, ACCO RSL		Country of Origin	Taiwan
Warranty 3-Year Limited Warranty		Certifications & Compliance	
			• • •

