# Kensington®

SD5780T Thunderbolt™ 4 Dual 4K Dock
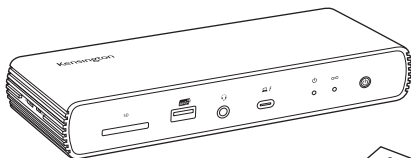
NA	EU	UK	AP	JP

kensington.com/register

1

DC 20V   HDMI

NA

AP

JP

UK

EU

2

USB-A 3.2 Gen2,
up to 10 Gbps
(BC 1.2, 5V/1.5A)*

Thunderbolt™ 4

Up to 96W

SD

$\bigcirc$

SD4.0, UHS-II

SD
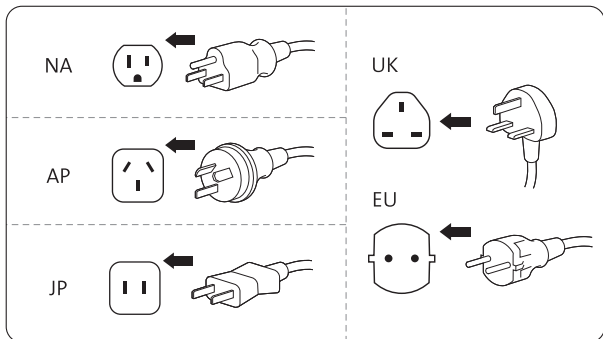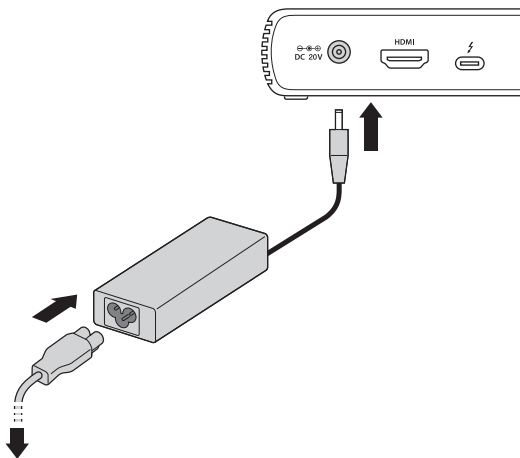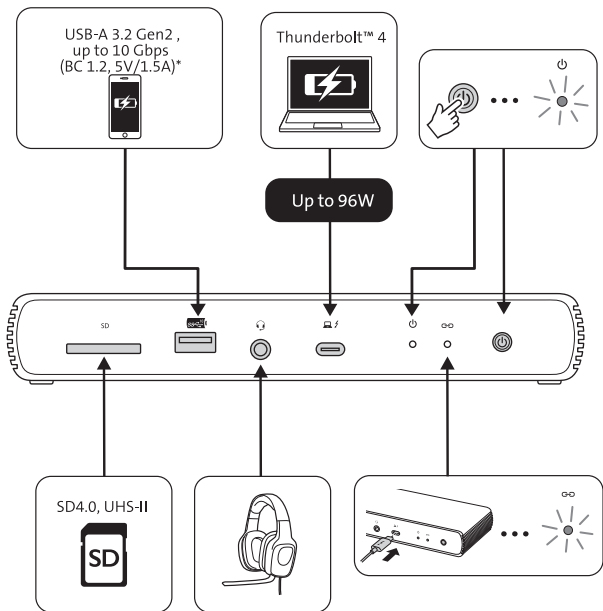
* USB Battery Charging 1.2-compliant devices

USB-A 3.2 Gen2 / 10 Gbps (5V/0.9A)

DC 20V HDMI

Thunderbolt™ 4 DFP
(5V/3A)
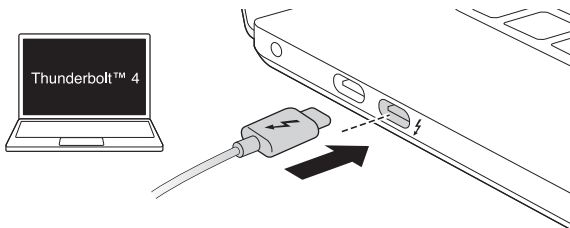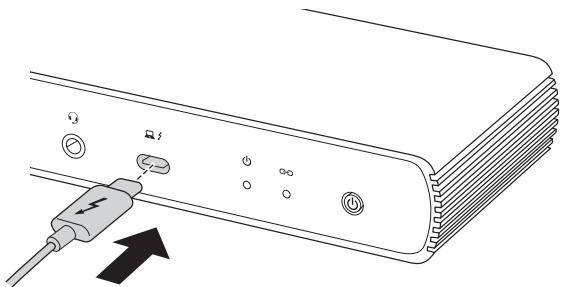
10/100/1000/
2500Mbps

3

Thunderbolt™ 4

4

5
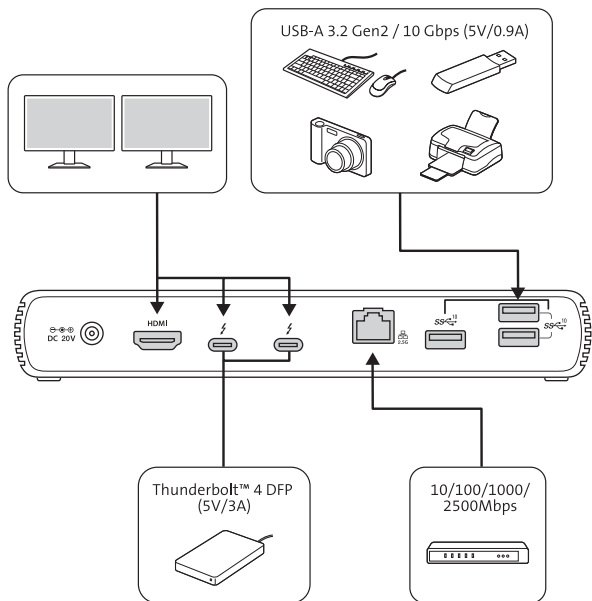
⌨	🖥	🖥 🖥	Hz
Thunderbolt™ 3 / Thunderbolt™ 4 / USB4 (Windows)	8K @ 60Hz*	4K @ 60Hz	1 x 4K up to 120Hz or 1 x 2K up to 240Hz
Thunderbolt™ 3 / Thunderbolt™ 4 / (macOS)	6K @ 60Hz	4K @ 60Hz	
MacBook M1 Pro / Pro Max	6K @ 60Hz	6K @ 60Hz	
USB-C Alt Mode (Windows)	4K @ 60Hz		
MacBook M1 / iPad Pro	6K @ 60Hz		

* Support for Display Stream Compression (DSC) is based on the host device and monitor capabilities.

6 Initial Thunderbolt™ 4 connection for Windows

New Thunderbolt™ device have been attached

Thunderbolt™ devices were attached. In order to approve them for use this application must be run with administrator privileges.
Click OK to run the **Thunderbolt**™ software with administrator privileges.

OK   Cancel

6.1 Manage Thunderbolt™ 4 devices and settings later

6.2

View Attached Devices
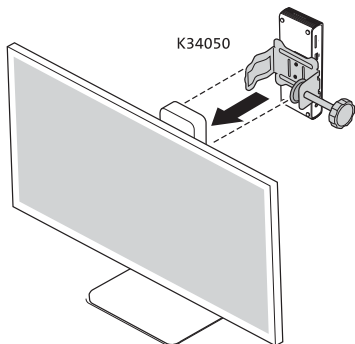Approve Attached Devices ›
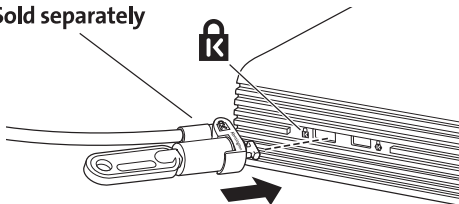Manage Approved Device

Settings
Exit

Sold separately

❶

K34050

❷
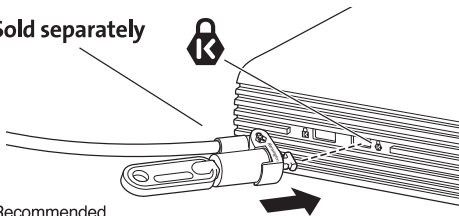
⚠ 🏋 **< = 13.2lbs**
(< = 6.0kg)

Sold separately

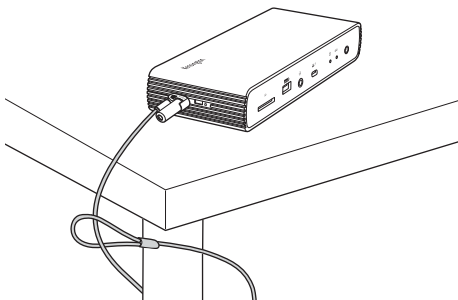

Recommended
K65020WW MicroSaver®2.0 Keyed Lock

Sold separately

Recommended
K64444WW NanoSaver™ Keyed Laptop Lock

www.kensington.com/support

この装置は、クラスB機器です。この装置は、住宅環境で使用することを目的
としていますが、この装置がラジオやテレビの受信機に近接して使用されると、
受信障害を引き起こすことがあります。
取扱説明書に従って正しい取扱いをして下さい。　　　　　　**VCCI — B**

K33040   901-5475-00